


## SUBMITTAL

### Features:

### TRV-30


TRV-30 is a thermostatic radiator valve with a replaceable stainless steel seat and disc for steam and hot water applications.



This series valve contains American Steam Control UNISERT-30, a removable insert, that fails in the "open" position if the thermostatic control is removed or broken off.

With the use of the A.S.C. UNICHANGER, the valve insert may be changed without draining the system or disturbing the piping.

## STRAIGHT PATTERN VALVE - DIMENSIONS

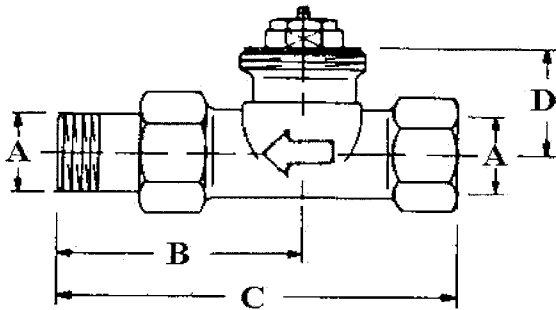

### Specifications

#### Application Range:

Max. Temperature:	250° F
Max. Water Pressure:	150 psig
Max. Steam Pressure:	15 psig

#### Materials:


Valve Body:	Brass, Nickel Plated
Trim:	Unisert -30
Casing:	Brass
Stem:	Stainless Steel
Seat:	Stainless Steel
Disc:	Stainless Steel
O-Ring Seals:	EPDM (Nordel) or Viton

SIZE	A	B	C	D
1/2"	1/2"	2 5/16"	3 3/4"	1 1/8"
3/4"	3/4"	2 1/2"	4 3/16"	1 1/8"
1"	1"	3 1/8"	4 5/16"	1 1/8"
1 1/4"	1 1/4"	5 7/8"	3 1/2"	1 1/8"


\* End Connections: Available with FPT x MPT, FPT x Solder, Solder x Solder (Double Union Only)

### Other Available Body Styles


Horizontal  
Angle




Vertical  
Angle



Straight Pattern  
Double Union



One Pipe Steam



CUSTOMER

PROJECT

ENGINEER

ARCHITECT

PRO/PO #

4/03 KW

American Steam Control

Division of Walsh Controls, Inc.

www.americansteamcontrol.com

101 Pennsylvania Blvd Pittsburgh, PA 15228

412-561-2195 1-888-703-3999

Fax: 412-344-8306